

triorganophosphites by reacting triorganophosphite compounds with nickel chloride in the presence of a finely divided reducing metal which is more electropositive than nickel, and in the presence of a promoter selected from the group consisting of NH_3 , NH_4X , $\text{Zn}(\text{NH}_3)_2\text{X}_2$, and mixtures of NH_4X and ZnX_2 , where X is a halide. Reducing metals include Na, Li, Mg, Ca, Ba, Sr, Ti, V, Fe, Co, Cu, Zn, Cd, Al, Ga, In, Sn, Pb, and Th, with Zn being preferred.

U.S. Patent 5,523,453 discloses a method of preparing nickel hydrocyanation catalysts containing bidentate phosphorous ligands. Zero-valent nickel compounds that contain ligands that can be displaced by the bidentate phosphorous ligand are a preferred source of nickel. Two such compounds are $\text{Ni}(\text{COD})_2$, where COD is 1,5-cyclooctadiene, and $(\text{oTTP})_2\text{Ni}(\text{C}_2\text{H}_4)$, where oTTP is $\text{P}(\text{O-ortho-C}_6\text{H}_4\text{CH}_3)_3$. Alternatively, divalent nickel compounds may be combined with reducing agents to produce a suitable nickel source. In the latter method of preparing catalyst, as the temperature of the catalyst preparation increases, the catalyst formation rate increases, but the amount of degradation product also increases. Accordingly, there is a need in the art for a process that allows for high reaction rates and low degradation.

SUMMARY OF THE INVENTION

The present invention is a process for preparing a hydrocyanation catalyst by contacting a bidentate phosphorus-containing ligand with nickel chloride in the presence of a nitrile solvent and a reducing metal which is more electropositive than nickel, the nickel chloride being in molar excess with respect to the reducing metal.

DETAILED DESCRIPTION OF THE INVENTION

The catalysts of the present invention may be prepared by contacting nickel chloride with a bidentate phosphorous-containing ligand in the presence of a
5 reducing metal, the nickel chloride being in molar excess with respect to the reducing metal. The reducing metal can be any metal which is more electropositive than nickel. Such metals include Na, Li, K, Mg, Ca, Ba, Sr,
10 Ti, V, Fe, Co, Cu, Zn, Cd, Al, Ga, In, Sn, Pb, and Th. Most preferred are Fe and Zn. The reducing metal (hereinafter "MET") is preferably finely-divided. The expression "finely-divided" means that the metal is of a particle size of less than 20 mesh.

15 Surprisingly, the rate of reaction is substantially independent of the concentration of the phosphorus-containing ligand or the amount of reducing metal, but, rather, depends on the amount of NiCl_2 present and the reaction temperature. Accordingly, increasing the amount
20 of NiCl_2 increases the reaction rate. Since undesirable side reactions, especially degradation, increase with temperature, using excess nickel chloride to increase the catalyst formation rate may allow a decrease in reaction temperature which will decrease undesirable side
25 reactions. The reaction is usually carried out such that the reducing metal is the limiting reagent. In other words, the amount of the NiCl_2 converted to catalyst is controlled by the amount of reducing metal added.

The source of nickel for this invention is
30 preferably nickel (II) chloride, NiCl_2 . Either hydrated or anhydrous forms of NiCl_2 may be used. Anhydrous NiCl_2 is preferred in order to minimize the hydrolytic degradation of the ligand. The expression "anhydrous"

means that the nickel chloride contains less than 2% by weight water. Nickel chloride containing 1% or less water is preferred. Anhydrous nickel chloride may be obtained by heating hydrated forms of NiCl_2 to temperatures of about 200°C to about 240°C . Heating the NiCl_2 above about 240°C produces NiCl_2 that is less reactive in the catalyst preparation and is not preferred. Also, heating the NiCl_2 for an extended period of time will also produce lower reactivity product. Accordingly, the NiCl_2 should not be heated above about 200°C for more than about 12 hours.

The expression "hydrated NiCl_2 " means NiCl_2 containing 2% or more water by weight. Examples of hydrated NiCl_2 include the dihydrate, the hexahydrate and aqueous solutions of NiCl_2 . Preferred sources for producing anhydrous NiCl_2 are the hexahydrate product and an aqueous solution. NiCl_2 as an aqueous solution is particularly preferred. The aqueous solution is available commercially as an approximately 29 weight percent NiCl_2 aqueous solution. However, it is believed that the invention is not limited to this weight percentage and aqueous solutions with different weight percent NiCl_2 will work. For practical reasons, the preferred aqueous solution contains 20 to 31 weight percent NiCl_2 . The lower limit is due to cost effectiveness of dehydrating a dilute solution. The upper limit is due to NiCl_2 solubility at ambient temperature, particularly due to the precipitation of $\text{NiCl}_2(\text{H}_2\text{O})_6$.

A preferred method of drying hydrated NiCl_2 is to first dry the NiCl_2 by spray or flash drying and then further dry the resulting product by thermal drying. A number of types of spray or thermal dryers are known to

one skilled in the art. Pneumatic conveying dryers and flash dryers are known to be interchangeable terminology in the drying trade. The choice of which type to use is not critical. Examples of spray dryers are co-current
 5 flow, counter current, and mixed flow. In this preferred process, the spray dryer should have an exit temperature of 120 to 150°C, preferably 130 to 135°C. Mean residence time of heat exposure with the spray dryer should be 1 to 75 seconds, preferably 1 to 45 seconds. The resulting
 10 product is typically the dihydrate product which contains approximately 22 weight percent water.



Following spray or flash drying, the product is preferably further dried by thermal drying. Choice of dryer type is not critical. The thermal drying may be by
 15 direct or indirect drying in which the heat is primarily by conduction or convection. Thermal drying may occur under reduced pressure or with a dry inert gas flow. For economic reasons, the dry inert gas is preferably nitrogen. Thermal drying should occur at a temperature
 20 between about 200 and about 240°C. The time of drying should not exceed about 12 hours.

The catalyst formation reaction is carried out in the presence of a nitrile solvent, preferably 3-pentenenitrile or 2-methyl-butenenitrile. The
 25 concentration of ligand may range from about 1% to 90% by weight. For practical reasons the preferred range of ligand concentration is 5% to 50%. The amount of reducing metal (MET) is determined by the desired nickel catalyst product concentration. The preferred amount of
 30 reducing metal (MET) will generally fall in the range of 0.1% to 5% of the reaction mass. The amount of NiCl_2 will be in molar excess to the reducing metal. The molar ratio of NiCl_2 to MET ranges from 1.1:1 to 100:1. The

preferred ratio of $\text{NiCl}_2\text{:MET}$ ranges from 2:1 to 50:1. The reaction temperature may range from 0°C to 120°C . The preferred temperature range is dependent on the NiCl_2 form. Hydrated forms of NiCl_2 react rapidly at lower temperatures than anhydrous NiCl_2 . For $\text{NiCl}_2 \cdot 2\text{H}_2\text{O}$, the preferred temperature range is 0°C to 60°C , and the most preferred range is 25°C to 50°C . For anhydrous NiCl_2 , the preferred temperature range is 30°C to 100°C , and the most preferred range is 50°C to 90°C . The reaction may be run within a wide pressure range. For practical reasons, the preferred pressure ranges from about 5 psia to 50 psia (34 to 340 kPa). The reaction may be run in batch or continuous mode.


Suitable ligands for the present invention are bidentate phosphorous-containing ligands selected from the group consisting of bidentate phosphites, bidentate phosphinites, and bidentate phosphines. Most preferred ligands are bidentate phosphite ligands.

The most preferred bidentate phosphite ligands are of the following structural formulae:

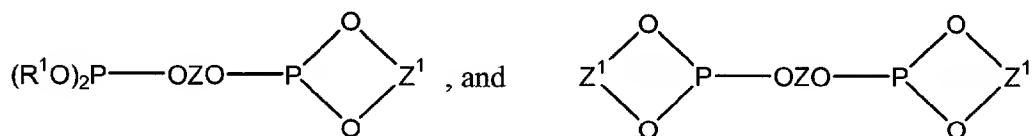

In these formulae, R^1 is phenyl, unsubstituted or substituted with one or more C_1 to C_{12} alkyl or C_1 to C_{12} alkoxy groups; or naphthyl, unsubstituted or substituted with one or more C_1 to C_{12} alkyl or C_1 to C_{12} alkoxy groups; and Z and Z^1 are independently selected from the

groups consisting of structural formulae I, II, III, and IV:

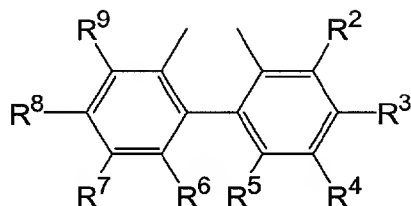

I


wherein:

R² and R⁹ are the same and are selected from H, C₁ to C₁₂ alkyl, and C₁ to C₁₂ alkoxy;

R³ and R⁸ are the same and are selected from H, C₁ to C₁₂ alkyl, and C₁ to C₁₂ alkoxy;

R⁴ and R⁷ are the same and are selected from H, C₁ to C₁₂ alkyl, and C₁ to C₁₂ alkoxy;

R⁵ and R⁶ are the same and are selected from H, C₁ to C₁₂ alkyl, and C₁ to C₁₂ alkoxy;

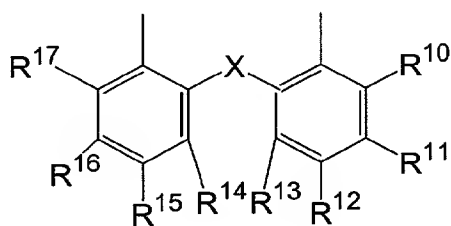

II


wherein:

X is O, S, or CH(R¹⁸);

R¹⁰ and R¹⁷ are the same and are selected from H, C₁ to C₁₂ alkyl, and C₁ to C₁₂ alkoxy;

R¹¹ and R¹⁶ are the same and are selected from H, C₁ to C₁₂ alkyl, and C₁ to C₁₂ alkoxy;


R^{12} and R^{15} are the same and are selected from H, C_1 to C_{12} alkyl, and C_1 to C_{12} alkoxy;
 R^{13} and R^{14} are the same and are selected from H, C_1 to C_{12} alkyl, and C_1 to C_{12} alkoxy; and
 R^{18} is H or C_1 to C_{12} alkyl;



III

wherein:

R^{19} and R^{20} are the same and are selected from H, C_1 to C_{12} alkyl, and C_1 to C_{12} alkoxy; and CO_2R^{21} ,
 R^{21} is C_1 to C_{12} alkyl or C_6 to C_{10} aryl, unsubstituted or substituted with C_1 to C_4 alkyl groups. The aryl groups are preferably phenyl or naphthyl.

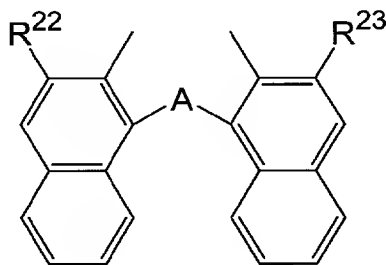

IV

wherein:

A is O, S, $CH(R^{24})$;


R^{22} and R^{23} are the same and are selected from H and CO_2R^{25} ;

R^{24} is H or C_1 to C_{12} alkyl;


R^{25} is C_1 to C_{12} alkyl; or

In the above structural formulae, the C₁ to C₁₂ alkyl, and C₁ to C₁₂ alkoxy groups may be straight chains or branched.


Examples of diorganophosphite compounds that can be made by the present process include those having the formulae V to XXVI, shown below.

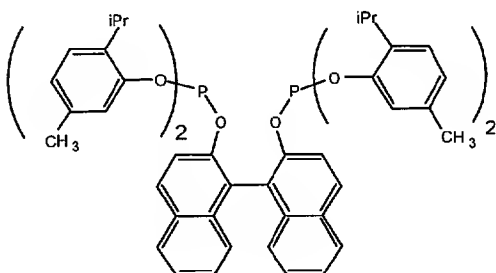

V (where iPr is isopropyl)

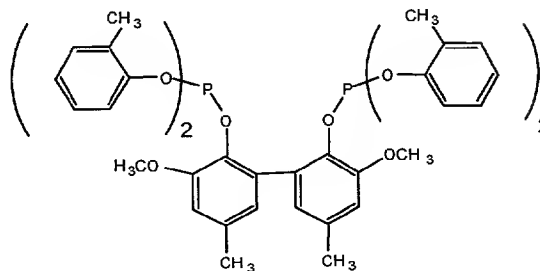


VI

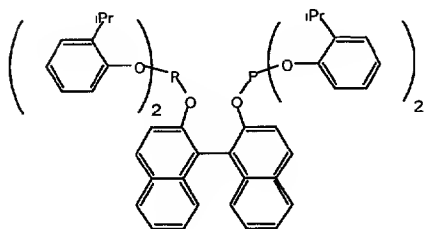


VII

(where iPr is isopropyl)

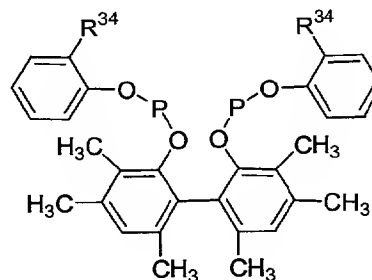


VIII

(where R³⁴ is methyl or ethyl)

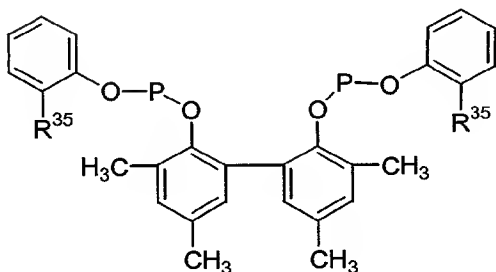


IX


(where R³⁵ is methyl, ethyl, or isopropyl)

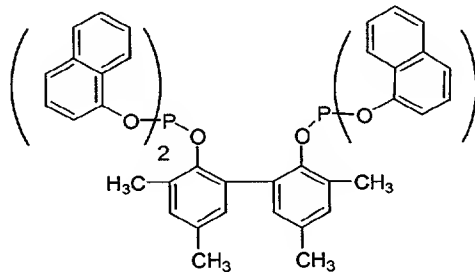


X

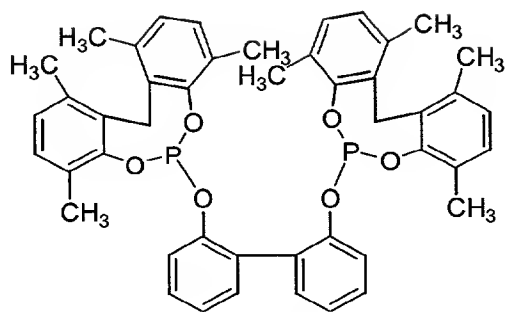


XI

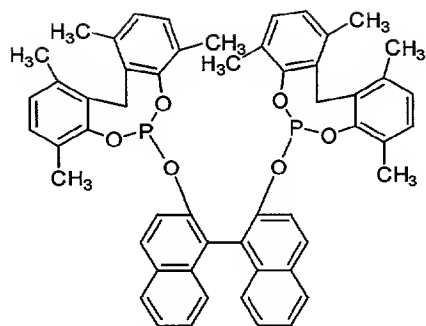


XII

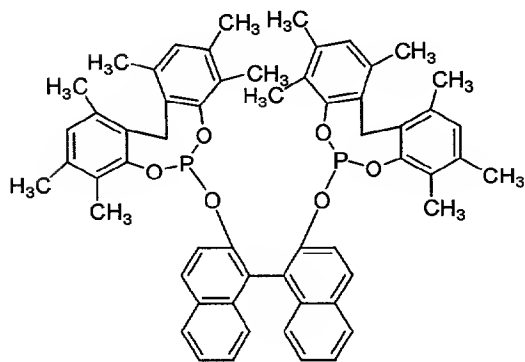


XIII

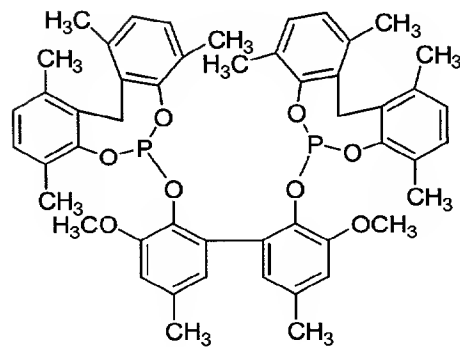


XIV

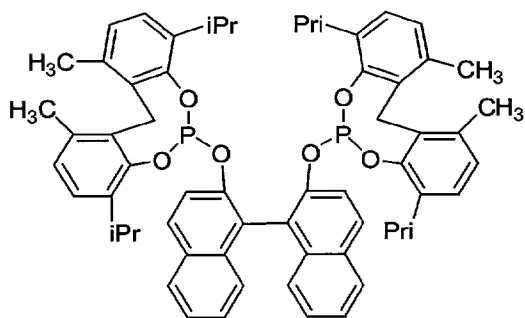


XV (where iPr is isopropyl)

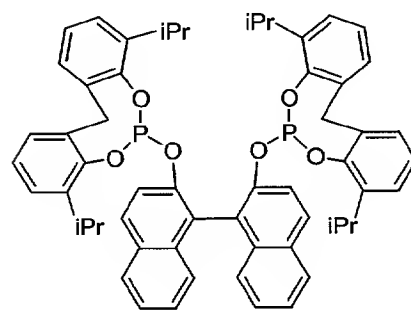


XVI (where iPr is isopropyl)

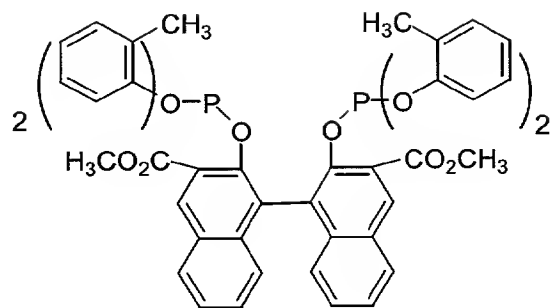


XVII

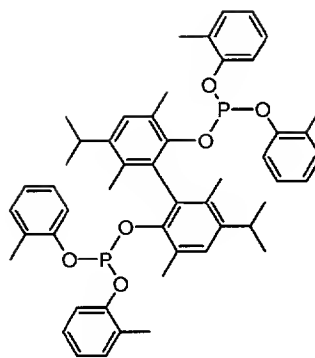


XVIII

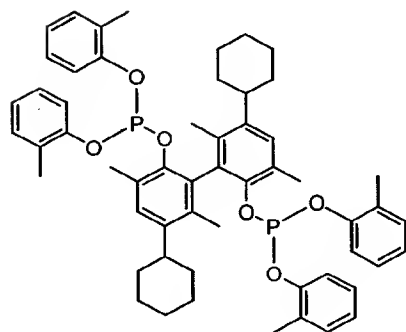


XIX

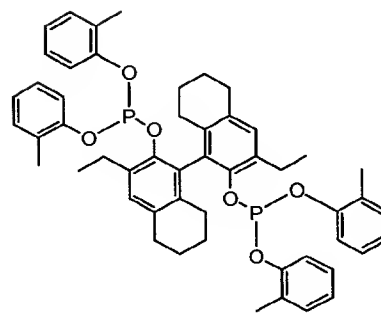


XX

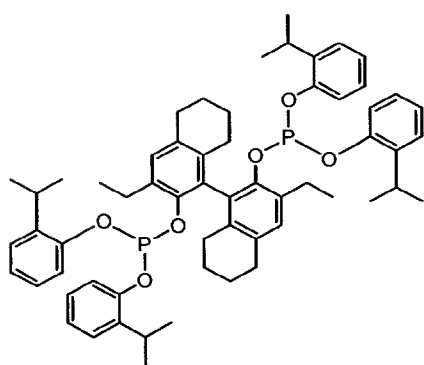


XXI

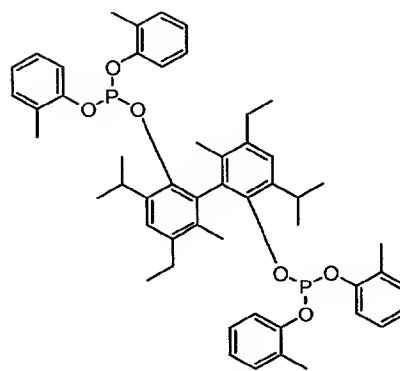


XII

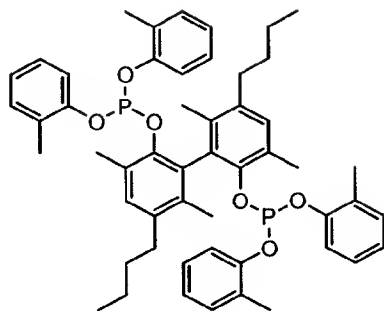


XXIII

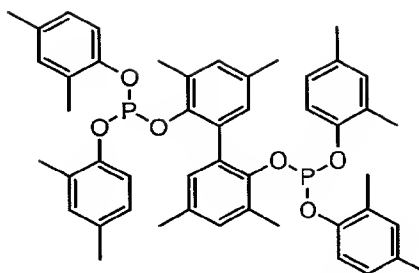

XXIV

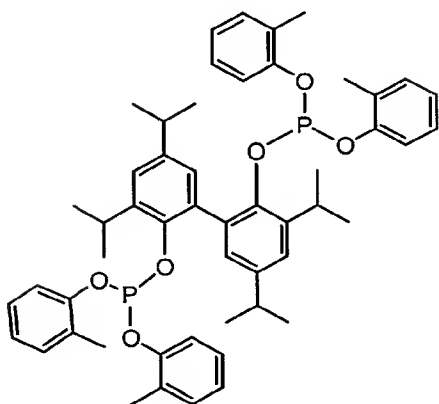

XXV

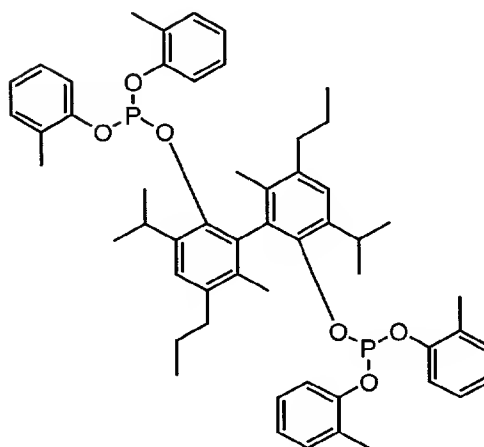

XXVI

Suitable bidentate phosphites are of the type disclosed in U. S. Patents 5,512,695, 5,512,696, 5,663,369, and 5,723,641, the disclosures of which are incorporated herein by reference. Suitable bidentate phosphinites are of the type disclosed in U. S. Patents 5,523,453 and 5,693,843, the disclosures of which are incorporated herein by reference.

The reaction may be carried out in a manner such that unreacted excess NiCl_2 may be separated from the reaction product by filtration or centrifugation. The collected excess nickel chloride can then be recycled back to a catalyst preparation reactor.

EXAMPLES

The invention is illustrated by the following non-limiting examples. In the following examples, the reducing metal is the limiting reagent in each reaction and therefore the extent of reaction (conversion) is expressed as the percentage of the reducing metal reacted. Unless otherwise noted, the extent of reaction (conversion) is determined by analyzing for the amount of active nickel produced by the catalyst synthesis reaction. The analysis is carried out by treating a solids-free aliquot of the reaction solution with dimethyl acetylenedicarboxylate (DMAD), which forms a stable nickel complex, (Ligand)Ni(DMAD), and analyzing quantitatively for this complex by High Pressure Liquid Chromatography (HPLC).

Examples 1-6, and 11-18 utilize anhydrous NiCl_2 as produced in Example 20. $\text{NiCl}_2 \cdot 2\text{H}_2\text{O}$ utilized in Examples 7-10 was produced by heating nickel chloride hexahydrate to about 130°C under reduced pressure.

Examples 1-6 illustrate that the catalyst synthesis reaction rate depends on the amount of anhydrous NiCl_2 charged to the reaction.

Example 1

A 100 mL reaction vessel fitted with a mechanical stirrer was charged under a nitrogen atmosphere blanket with 3-pentenitrile (80 mL; 830 mmol), ligand V (18 g; 19 mmol), NiCl_2 (3.22 g; 24.8 mmol), and zinc powder (0.61 g; 9.3 mmol). The reaction mixture was stirred at 100°C for 3 hours, and samples were withdrawn every 30 minutes for analysis. After 2 hours, 70% conversion of NiCl_2 to catalyst had occurred, and after 3 hours, greater than 95% conversion of NiCl_2 to catalyst had occurred.

Example 2

A reaction was executed in the manner of example 1, except that the amount of NiCl_2 charged (1.61 g; 12.4 mmol) was half as much. After 2 hours, about 37% conversion of NiCl_2 to catalyst had occurred, and after 3 hours, about 60% conversion of NiCl_2 to catalyst had occurred.

In the following examples 3 to 10, a catalyst source which was depleted in active nickel, called "recycle catalyst," was recharged. In these cases, "recycle catalyst" contained 11 weight percent (wt%) Ligand V in 3-pentenitrile.

Example 3

A 100 mL reaction vessel fitted with a mechanical stirrer was charged under a nitrogen atmosphere blanket with recycle catalyst (100 g, containing 11 wt% ligand V), NiCl_2 (1.21 g; 9.3 mmol), and zinc powder (0.61 g; 9.3 mmol). The reaction mixture was stirred at 80°C for 4 hours, and samples were withdrawn every 30 minutes for analysis. After 4 hours, less than 2% conversion NiCl_2 to catalyst had occurred.

Example 4

A reaction was executed in the manner of example 3, except that the amount of NiCl_2 charged (2.42 g; 18.6 mmol) was twice as much as in example 3. After 4 hours, 35% conversion of NiCl_2 to catalyst had occurred.

Example 5

A reaction was executed in the manner of example 3, except that the amount of NiCl_2 charged (4.84 g; 37.2

mmol) was four times as much as in example 3. After 4 hours, 75% conversion of NiCl_2 to catalyst had occurred.

Example 6

5 A reaction was executed in the manner of example 3, except that the amount of NiCl_2 charged (7.26 g; 56.0 mmol) was six times as much as in example 3. After 2 hours, 77% conversion of NiCl_2 to catalyst had occurred, and after 4 hours, 83% conversion of NiCl_2 to catalyst had
10 occurred.

The following examples 7 to 10 show that the use of hydrated NiCl_2 ($\text{NiCl}_2 \cdot 2\text{H}_2\text{O}$) produces the same rate dependence on nickel chloride concentration as anhydrous NiCl_2 , but at a lower temperature.

Example 7

15 A 100 mL reaction vessel fitted with a mechanical stirrer was charged under a nitrogen atmosphere blanket with recycle catalyst (100 g, containing 11 wt% ligand
20 V), $\text{NiCl}_2 \cdot 2\text{H}_2\text{O}$ (1.21 g; 7.3 mmol), and zinc powder (0.61 g; 9.3 mmol). The reaction mixture was stirred at 25°C for 4 hours, and samples were withdrawn every 30 minutes for analysis. After 4 hours, about 13% conversion NiCl_2 to catalyst had occurred.

Example 8

25 A reaction was executed in the manner of example 7, except that the amount of $\text{NiCl}_2 \cdot 2\text{H}_2\text{O}$ charged (2.42 g; 14.6 mmol) was twice as much as in example 7. After 4 hours,
30 27% conversion of NiCl_2 to catalyst had occurred.

Example 9

A reaction was executed in the manner of example 7, except that the amount of $\text{NiCl}_2 \cdot 2\text{H}_2\text{O}$ charged (4.84 g; 29.2 mmol) was four times as much as in example 7. After 4 hours, 93% conversion of NiCl_2 to catalyst had occurred.

Example 10

A reaction was executed in the manner of example 7, except that the amount of $\text{NiCl}_2 \cdot 2\text{H}_2\text{O}$ charged (7.26 g; 43.8 mmol) was six times as much as in example 7. After 30 minutes, greater than 95% conversion of NiCl_2 to catalyst had occurred.

Comparative Example 1 illustrates that increasing the molar ratio of the reducing metal relative to NiCl_2 does not increase the reaction rate. In this example, NiCl_2 is the limiting reagent, and the extent of reaction is reported as the conversion of NiCl_2 . The NiCl_2 was that produced as in Example 20.

Comparative Example 1

A "recycle catalyst" solution (9 grams of 30 wt% Ligand V) was treated with NiCl_2 (0.11 grams) and zinc (0.10 g). The mixture was agitated and heated at about 100°C . Analysis of a clear-liquid sample after 2 hours revealed 54% conversion of the NiCl_2 . Reactions executed in a similar manner, except that the zinc charged was 0.20 grams and 0.40 grams, resulted in conversions of 54% and 50%, respectively.

The following examples 11 to 17 show that the process of the present invention is applicable to additional phosphorous-containing ligands, and that the same effects are observed when iron is used as the reducing agent. In these examples, the extent of

reaction was determined by measuring nickel in solution by Inductively Coupled Plasma (ICP).

Example 11

5 A solution of Ligand XXIV was prepared by dissolving
2.497 grams of Ligand XXIV in 24.008 grams of dry 3-
pentenenitrile. An aliquot of this solution (13.0 grams)
was mixed with anhydrous NiCl_2 (1.22 grams) and zinc
(0.102 grams). The mixture was agitated and heated at a
10 temperature of about 80°C . Analysis of a clear liquid-
only sample taken after 2 hours revealed 56% conversion
in a similar reaction, except that only 0.20 grams of
 NiCl_2 was charged to the mixture, only 10% conversion was
found after 2 hours.

Example 12

15 A solution of Ligand XXI was prepared by dissolving
3.03 grams of Ligand XXI in 24.16 grams of dry 3-
pentenenitrile. An aliquot of this solution (13.38
20 grams) was mixed with 1.20 grams of anhydrous NiCl_2 and
0.10 grams of zinc. The mixture was agitated and heated
at a temperature of about 81°C . Analysis of a clear
liquid-only sample taken after 2 hours revealed 41%
conversion. In a similar reaction, except that only 0.20
25 grams of NiCl_2 was charged to the mixture, only 10%
conversion was found after 2 hours.

Example 13

30 A solution of Ligand XVIII was prepared by
dissolving 2.59 grams of Ligand XVIII in 24.0 grams of
dry 3-pentenenitrile. An aliquot of this solution (13.38
grams) was mixed with 1.20 grams of anhydrous NiCl_2 and
0.10 grams of zinc. The mixture was agitated and heated

at a temperature of about 80°C. Analysis of a clear liquid-only sample taken after 2 hours revealed 73% conversion. In a similar reaction, except that only 0.20 grams of NiCl_2 was charged to the mixture, only 14% conversion was found after 2 hours.

Example 14

A solution of Ligand XIX was prepared by dissolving 2.85 grams of Ligand XIX in 24.0 grams of dry 3-pentenenitrile. An aliquot of this solution (13.4 grams) was mixed with 1.20 grams of anhydrous NiCl_2 and 0.10 grams of zinc. The mixture was agitated and heated at a temperature of about 78°C. Analysis of a clear liquid-only sample taken after 2 hours revealed 38% conversion. In a similar reaction, except that only 0.20 grams of NiCl_2 was charged to the mixture, only 10% conversion was found after 2 hours.

Example 15

A solution of Ligand XX was prepared by dissolving 2.67 grams of Ligand XX in 24.0 grams of dry 3-pentenenitrile. An aliquot of this solution (13.0 grams) was mixed with 1.23 grams of anhydrous NiCl_2 and 0.10 grams of zinc. The mixture was agitated and heated at a temperature of about 81°C. Analysis of a clear liquid-only sample taken after 2 hours revealed 59% conversion. In a similar reaction, except that only 0.20 grams of NiCl_2 was charged to the mixture, only 10% conversion was found after 2 hours.

Example 16

A solution of Ligand XXV was prepared by dissolving 2.68 grams of Ligand XXV in 24.0 grams of dry 3-

pentenenitrile. An aliquot of this solution (13.1 grams) was mixed with 1.20 grams of anhydrous NiCl_2 and 0.10 grams of zinc. The mixture was agitated and heated at a temperature of about 81°C . Analysis of a clear liquid-only sample taken after 2 hours revealed 45% conversion. In a similar reaction, except that iron powder (0.43 grams) was charged to the mixture instead of zinc, 34% conversion was found after 2 hours.

Example 17

A solution of Ligand XXVI was prepared by dissolving 2.77 grams of Ligand XXVI in 24.0 grams of dry 3-pentenenitrile. An aliquot of this solution (12.6 grams) was mixed with 1.20 grams of anhydrous NiCl_2 and 0.10 grams of zinc. The mixture was agitated and heated at a temperature of about 80°C . Analysis of a clear liquid-only sample taken after 2 hours revealed 37% conversion. In a similar reaction, except that iron powder (0.42 grams) was charged to the mixture instead of zinc, 38% conversion was found after 2 hours.

Example 18

A solution of Ligand V was prepared by dissolving 3.03 grams of Ligand V in 24.0 grams of dry 3-pentenenitrile. An aliquot of this solution (13.3 grams) was mixed with 1.20 grams of anhydrous NiCl_2 and 0.44 grams of iron. The mixture was agitated and heated at a temperature of about 81°C . Analysis of a clear liquid-only sample taken after 2 hours revealed 16% conversion. In a similar reaction, except that only 0.2 grams of NiCl_2 was charged to the mixture, only 7% conversion was found after 2 hours.

Examples 19-24 demonstrate preferred methods of drying NiCl_2 . Comparative Examples 2-3 are presented for comparison to the present invention and show that overheating while drying will lead to a less reactive material. "BET surface area" analysis refers to an analytical technique, well known to those skilled in the art, for measuring surface area of a solid material. The letters "BET" refer to Brunauer Emmett Teller, who developed the theory of multilayer gas adsorption/absorption onto solid surfaces. For example, using nitrogen gas at 77°K , the surface area of a solid material may be estimated by measuring the number of moles of nitrogen adsorbed as a function of the partial pressure of the gas for a given weight of solid. By applying the sorption theory of BET to the resulting isotherm absorption curve, it is easy to determine an effective surface area for the solid.

Example 19

10g of nickel chloride hexahydrate was spread thinly in a clean quartz boat in a quartz-lined tube furnace equipped with a flow of 100mL/min dry nitrogen. The exit nitrogen stream was passed through a mineral oil bubbler and vented to a hood. The sample was then heated to 240°C over 15 minutes and held there for a total of 60 minutes. The sample was then cooled and sealed and taken into a nitrogen-flushed glove box for collection and storage prior to catalyst preparation experiments. A small portion of the material was analyzed for water content by Thermogravimetric Analysis (TGA) by heating it to 400°C at $10^\circ\text{C}/\text{min}$. The weight loss at approximately 200°C provided the measure of water in the sample.

This sample contained 0.3 weight percent water and had a BET surface area of 35 m²/g and an estimated crystallite size of 9 nm. When used in a catalyst preparation similar to that of Example 1, this material generated 76% conversion.

Comparative Example 2

The procedure of Experiment 19 was repeated, except that the nickel chloride was additionally heated to 350°C for 30 minutes in nitrogen. The recovered sample had less than 0.05 weight percent water, BET surface area of 13 m²/g and estimated crystallite size of 22 nm. When used in a catalyst preparation similar to that of Example 1, this material generated 36% conversion.

Comparative Example 3

The procedure of Experiment 19 was repeated, except that the nickel chloride was additionally heated to 500°C for 30 minutes in nitrogen. The recovered sample had less than 0.05 weight percent water, BET surface area of 2 m²/g and estimated crystallite size of 44 nm. When used in a catalyst preparation similar to that of Example 1, this material generated 1% conversion.

Example 20

A 9.1 kg of NiCl₂ hydrate, containing 10.9 weight percent H₂O, was loaded into a rotary vacuum dryer. 20 kg of NiCl₂ hexahydrate was added to the dryer, resulting in an equivalent NiCl₂ charge containing 34.7 weight percent H₂O. The pressure in the dryer was reduced to 100 torr (690 kPa), and the temperature in the dryer was gradually increased to 100°C over a 5 hour period. The expression "temperature in the dryer" refers to the temperature of

the bulk contents. The vacuum dryer was indirectly heated with a hot oil supply at a temperature no higher than 20°C higher than the measured bulk temperature. TGA tests confirmed that the dryer contents were dehydrated to a residual moisture of 21.5 weight percent H₂O, equivalent to a dihydrate state. The temperature in the dryer was then raised to 200°C over a 4 hour period, and subsequently raised to 240°C over a 2 hour period. TGA tests showed that the residual moisture was reduced to less than 0.1 weight percent H₂O. It had a BET surface area of 24 m²/g and had an estimated crystallite size of 17 nm. Approximately 17 kg of anhydrous NiCl₂ product was recovered. When used in a catalyst preparation similar to that of Example 1, this material generated 79% conversion.

Example 21

An aqueous solution containing approximately 29 weight percent NiCl₂ was pumped into a spray dryer at an average rate of 33.5 kg/hr. Filtered ambient air was indirectly heated to 400°C and injected co-currently at an average rate of 327 kg/hr. Under these conditions, the average outlet temperature of the air exiting the spray dryer was 135°C. During a 4 hour tests, 50 kg of NiCl₂ dihydrate was produced containing about 22 weight percent H₂O.

About 30 kg of the spray dried product was loaded into the same rotary vacuum dryer as in Example 20. The pressure in the rotary dryer was reduced to 50 torr (345 kPa), and the temperature in the dryer was increased to 220°C over a 2 hour period, and maintained for another 3 hours. TGA tests showed that the residual moisture was

reduced to less than 0.1 weight percent H₂O, and had an estimated crystallite size of 18 nm. When used in a catalyst preparation similar to that of Example 1, this material generated 82% conversion. When used in a similar catalyst preparation, except at a reaction temperature of about 80°C, the conversion was 64% after 2 hours.

Example 22

This Example 22 shows that the spray drier product may be fed continuously to a thermal processor and that low pressure in the thermal processor is not required to obtain satisfactory results.

The procedure in Example 21 was repeated, except that the NiCl₂ dihydrate isolated from the spray dryer was then fed continuously into a thermal processor that was heated indirectly by a hot oil supply at 244°C, resulting in the bulk temperature being about 10°C lower. The pressure in the thermal processor was maintained slightly below atmospheric. The anhydrous product discharged from the thermal processor contained a residual moisture of less than 1 weight percent H₂O. When used in a catalyst preparation similar to that of Example 1, except at a reaction temperature of about 80°C, this material generated 62% conversion.